KFP-CX3-09

Conventional Fire and Extinguishing Panel - 3 Zone - Spanish



KFP-CX3-09

Conventional Fire and Extinguishing Panel - 3 Zone - Spanish

Technische Spezifikationen

General

Maximum system capacity (device count)	bis zu 96

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	3

Zone

Maximum zone capacity	fino a 3

Physical

Form factor	Mittel
Colour	Bianco puro (RAL 9010)
Mounting type	Montaggio a superficie

Environmental


Environment	Drinnen

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN12094-1, EN54-13, EN54-2, EN54-4

Kompatible Produkte

Kategorie	Referenz	Beschreibung
Batteries	BS130N	Akku, 12 V, 12 Ah, VdS-Nr. G 115034
Panel	2010-1-RB	Relaisplatine für 1X-Brandmeldezentrale, Nicht überwacht
Panel	2010-1-SB	Relaisplatine für 1X-Brandmeldezentrale, überwacht

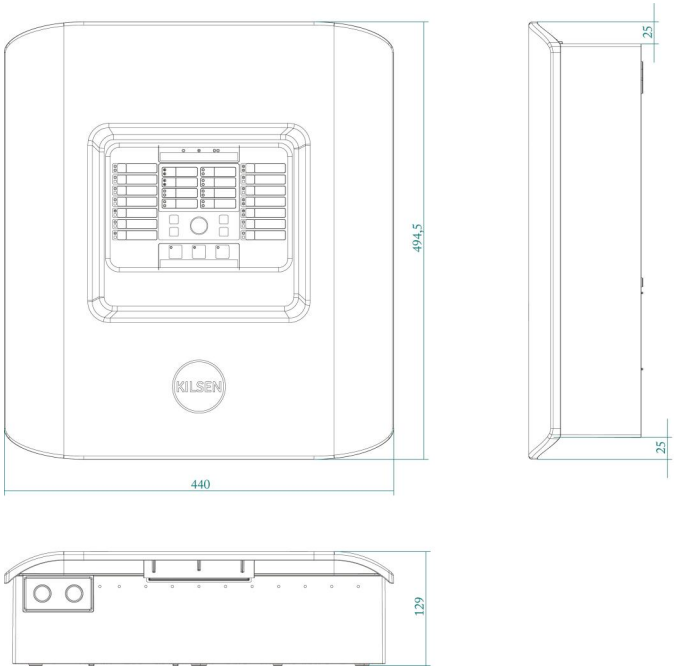

KIDDE COMMERCIAL

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.