# ASC367

**Conventional Ceiling Mount VAD, Multi Tone, Deep Base - Red Flash**



# ASC367

## Conventional Ceiling Mount VAD, Multi Tone, Deep Base - Red Flash

## Spécifications techniques

### Electrical

| | |
|---|---|
| Current consumption | Sounder: 5.1 mA, Beacon: 20 mA @ 0.5 Hz / 40 mA @ 1 Hz |

### Physical

| | |
|---|---|
| Net weight | 215 g |
| Colour | Rød |
| Mounting type | Samling på underlag |
| Mounting position | Decke |
| Mounting base | Tief |
| Material | Høj slag polykarbonat |


### Environmental

| | |
|---|---|
| Operating temperature | -25 to +70°C |
| Relative humidity | 5 to 95% |
| Environment | Indendør, Udendørs |
| IP rating | IP65 |

### Regulatory

| | |
|---|---|
| Compliancy | CE, REACH, RoHS 3, WEEE |
| Certification | EN54-23, EN54-3 |

EN54-23 Coverage: C–3-8.9

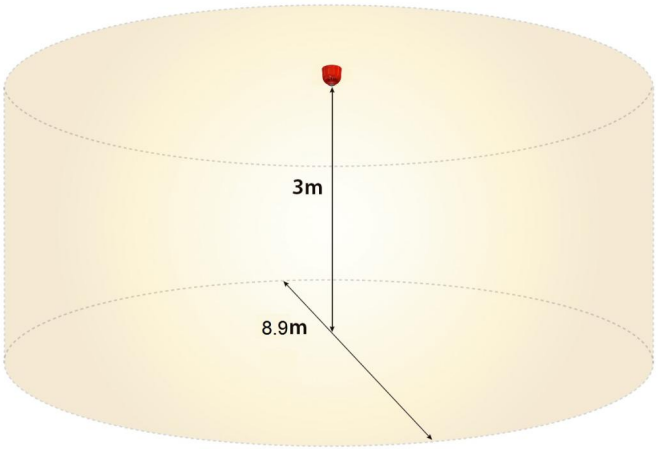


KIDDE GLOBAL SOLUTIONS

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57