# KFP-CX3-09

## Conventional Fire and Extinguishing Panel - 3 Zone - Spanish



# KFP-CX3-09

## Conventional Fire and Extinguishing Panel - 3 Zone - Spanish

## Spécifications techniques

### General

| | |
|---|---|
| Maximum system capacity (device count) | bis zu 96 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 3 |

### Zone

| | |
|---|---|
| Maximum zone capacity | bis zu 3 |

### Physical

| | |
|---|---|
| Form factor | Medium |
| Colour | Ren hvid (RAL 9010) |
| Mounting type | Overflademontering |

### Environmental


| | |
|---|---|
| Environment | Indendør |

### Regulatory

| | |
|---|---|
| Compliancy | CPD, RoHS, WEEE |
| Certification | EN12094-1, EN54-13, EN54-2, EN54-4 |

### Produits compatibles

| Catégorie | Référence | Description |
|---|---|---|
| Batteries | BS130N | Batterie, 12 V, 12 Ah |
| Panel | 2010-1-RB | Panneau Incendie Conventionnel Accessoire Carte relais - Non surpervisé |
| Panel | 2010-1-SB | Panneau Incendie Conventionnel Accessoire Carte relais - Supervisé |

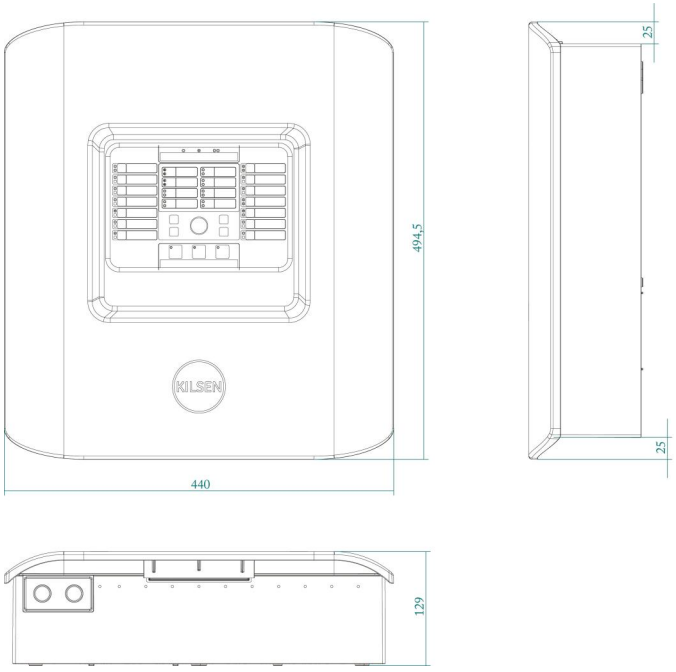


KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57