# 1X-F4-11

## Conventional Fire Panel - 4 Zone - Dutch Belgian



# 1X-F4-11

## Conventional Fire Panel - 4 Zone - Dutch Belgian

## Specifiche tecniche

### General

| | |
|---|---|
| Maximum system capacity (device count) | jusqu'à 1280 |
| Network size (nodes) | jusqu'à 16 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 4 |

### Zone

| | |
|---|---|
| Maximum zone capacity | jusqu'à 4 |

### Input

| | |
|---|---|
| Input quantity | 2 |

### Physical


| | |
|---|---|
| Form factor | Lille |
| Colour | Grå (RAL 7035) |
| Mounting type | Overflademontering |

### Environmental

| | |
|---|---|
| Environment | Indendør |

### Regulatory

| | |
|---|---|
| Compliancy | CPD, RoHS, WEEE |
| Certification | EN54-13, EN54-2, EN54-4 |

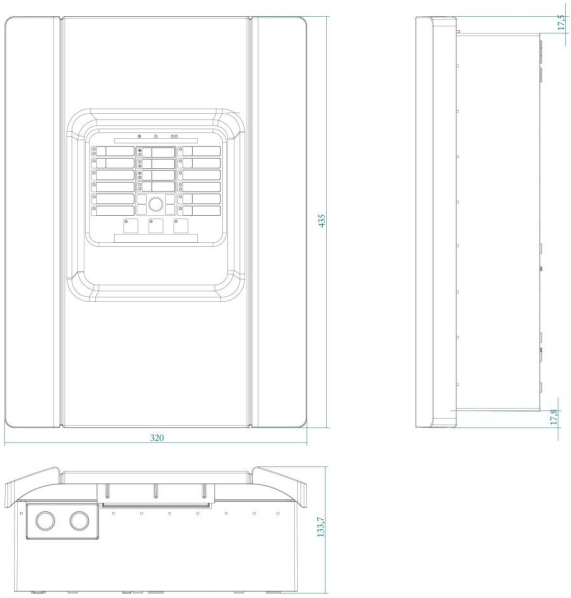


KIDDE COMMERCIAL

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57