KFP-CX3-09

Conventional Fire and Extinguishing Panel - 3 Zone - Spanish

Overview

KFP-C fire control panels offer state of the art architecture in configurations that deliver an uncomplicated solution for small to mid-sized conventional applications. They feature an attractive contemporary design that fits with any decor. The gently curved door front offers a distinctive flair. Operator controls are inset in a striking gray lexan.

With support for the Kilsen KL700 line of conventional detectors and accessories, these quick-to-configure systems offer versatility that benefits building owners and installation/maintenance companies alike.

The Panel

The KFP-CX3 is a conventional fire alarm and extinguishing control panel. It is supplied in local language with 3 fire zones that support up to 20 devices per zone. These zones may be configured for extinguishing in single zone or double zone configuration in any combination of zones. In addition the panel offers supervised outputs for first stage and second stage notification as well as optical warning indicators and actuator activation. Standard relay outputs are provided for EN54 compliance and system status notification, as well as multiple inputs for system control.

Options

The panels support 2 types of auxiliary relay boards, one with 4 standard relays, and one with 4 supervised relays. With these boards the panel outputs may be expanded with up to 16 additional outputs.

Approvals & Compliance

The product line carries the following accreditations:

• EN54:2, EN54:4 and CE approved
• CPD certified
• EN12094-1 certified

• WEEE compliant
• RoHS compliant



Dettagli

- Modern, elegant design
- Easy removable parts for quick and easy installation
- Three detection zones
- Single zone, double zone or any combination of zones configurable for release
- 6 Pre-configured relays and 8 supervised inputs for extinguishing control
- Configurable fire routing, sounder, extinguishing, reset and door monitoring delays
- Configurable "Hold Mode" type-A or type-B
- Sounders configurable for pulsing or continuous operation
- Extinguishing agent flow confirmation
- Continuous or resetable 24 VDC auxiliary supply
- Auxiliary standard & supervised relay output support
- Default support for special functions such as: - EN54 compliant user access levels - Basic & Advanced level configuration - mixed zones - front panel diagnostics with test & disable control - one-man walk test

KFP-CX3-09

Conventional Fire and Extinguishing Panel - 3 Zone - Spanish

Specifiche tecniche

General

Maximum system capacity (device count)	jusqu'à 96

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	3

Zone

Maximum zone capacity	jusqu'à 3

Physical

Form factor	Medium
Colour	Ren hvid (RAL 9010)
Mounting type	Overflademontering

Environmental


Environment	Indendør

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN12094-1, EN54-13, EN54-2, EN54-4

Prodotti compatibili

Categoria	Riferimento	Descrizione
Batteries	BS130N	Batteria, 12 V, 12 Ah
Panel	2010-1-RB	Modulo opzionale per centrali serie 1X-xx equipaggiato di 4 uscite a rele non controllate
Panel	2010-1-SB	Modulo opzionale per centrali serie 1X-xx equipaggiato di 4 uscite a rele supervisionate

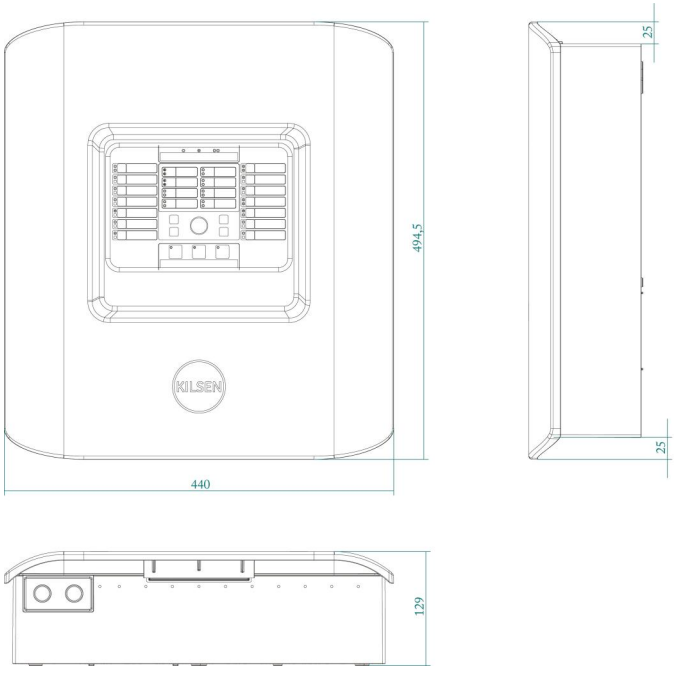

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57