ZP2-F2-FB2-99

Addressable Fire Panel with Fire Brigade Controls - 2 Loop - English UK



ZP2-F2-FB2-99

Addressable Fire Panel with Fire Brigade Controls - 2 Loop - English UK

Technische Spezifikationen

General

Maximum system capacity (device count)	up to 32512
Network size (nodes)	up to 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	4

Zone

Maximum zone capacity	up to 512

Physical


Form factor	Large
Colour	Grey (RAL 7035)
Mounting type	Surface mount

Environmental

Environment	Indoor

Regulatory

Compliancy	BS5839-1, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

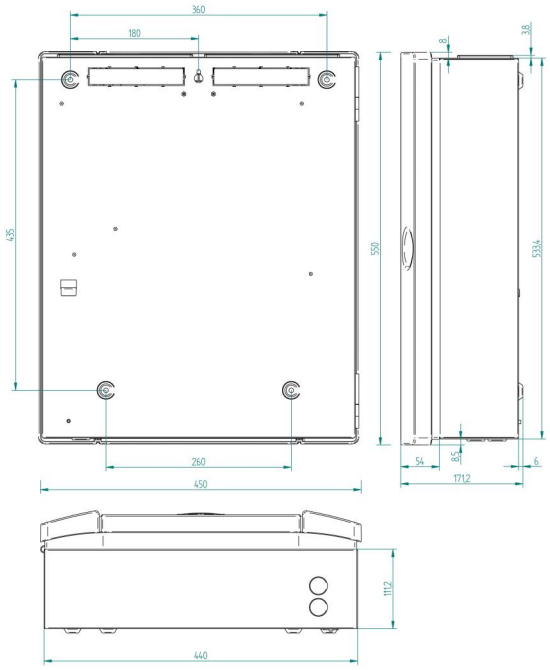

KIDDE COMMERCIAL

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.