KIDDE™ COMMERCIAL

ZP2-F2-S

Addressable Fire Panel - 2 Loop small cabinet



ZP2-F2-S

Addressable Fire Panel - 2 Loop small cabinet

Technische Spezifikationen

General

Maximum system capacity (device count)	up to 16256
Network size (nodes)	up to 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	2

Zone

Maximum zone capacity	up to 512

Physical

Form factor	Small
Colour	Grey (RAL 7035)
Mounting type	Surface mount

Environmental

Environment	Indoor

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

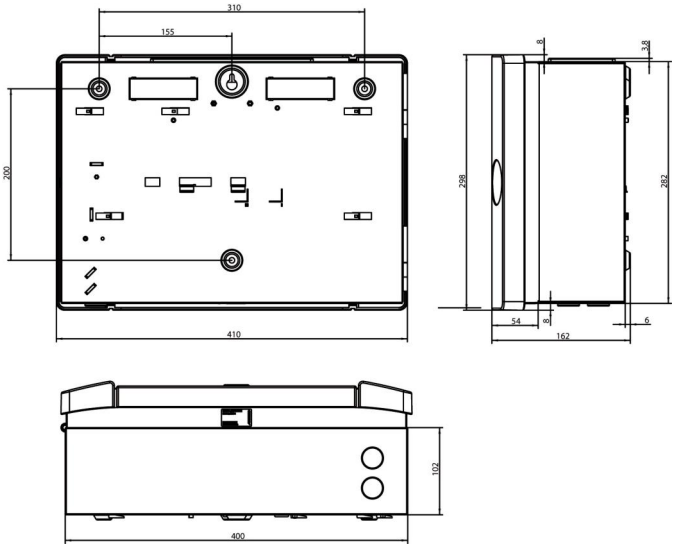

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.