240335

Conventional DIN manual call point, Feuer

General

The 240335 is a RED, type-B, doubleaction manual call point for surface mount applications.

Construction

In comparison with plastic cases, the robust design housing made of die-cast aluminium proves to be of advantage even after years of use, thanks to its resistance to environmental impact. It is virtually unbreakable, form stable and hardly changes its colour in sunlight.

Numerous design details, such as the self-closing lock cover, protect the interior from dust or water penetration and facilitate mounting and cabling. The protection class is IP43.

Safety

The door with the easily replaceable glass pane has an opening angle of over 180°. When the call point is activated, the door is mechanically prevented from closing.



Details

- Conventional technology
- LED indication for activation status indication
- Operating instructions using standardised EN54-11 symbols
- Attractive design housing made of robust die-cast aluminium
- Designed for surface mount applications
- EN standard type B manual call point, dual action
- 1000 Ohm series resistor fitted

240335
Conventional DIN manual call point, Feuer

Technical specifications

General

Status indication	LED
Connectivity	2-wire zone

Electrical

Power supply type	Zone powered
Operating voltage	10 to 30 VDC
Cable specification	<1.5 mm²
Terminals	6

Detection

Detection principle	Manual activation
Monitoring	Off, On
Installation height	Determined by local regulation

Output

Output quantity	1
Output type and rating	Contact (25 VAC @ 2 A or 60 VDC @ 2 A)

Physical

Physical dimensions	127 x 127 x 35 mm (W x H x D)
Net weight	420 g
Colour	Ash grey, Red (RAL 3000)
Mounting type	Surface mount, Wall mount
Cable entries	Top & bottom (2 x M20×1.5), Rear wall (2 x 24×10 mm)
Material (body)	Die-cast aluminium
Functional marking	FEUER

Environmental


Vandal proof	No
Operating temperature	-25 to +70°C (max. 12 h) -20 to +60°C (continuous operation)
Relative humidity	5 to 95% noncondensing
Environment	Indoor
IP rating	IP43 (standard)

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Voluntary marks	VdS
Standards	EN54:11

Compatible products

Category	Reference	Description
Detection device	DM966	Replacement clear windows for push-button activated manual call points

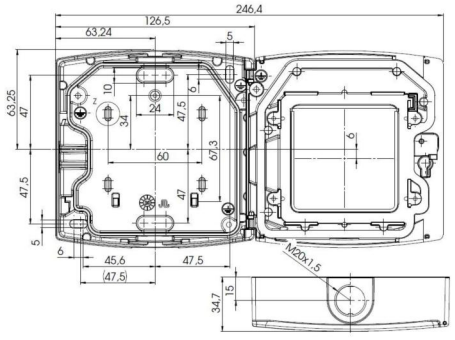

KIDDE GLOBAL SOLUTIONS

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 29 April 2025 - 9:11