ZP2-F2-FB2

Addressable Fire Panel with Fire Brigade Controls - 2 Loop



ZP2-F2-FB2

Addressable Fire Panel with Fire Brigade Controls - 2 Loop

Spécifications techniques

General

Maximum system capacity (device count)	up to 32512
Network size (nodes)	up to 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	4

Zone

Maximum zone capacity	up to 512

Physical

Form factor	Large
Colour	Grey (RAL 7035)
Mounting type	Surface mount

Environmental

Environment	Indoor

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

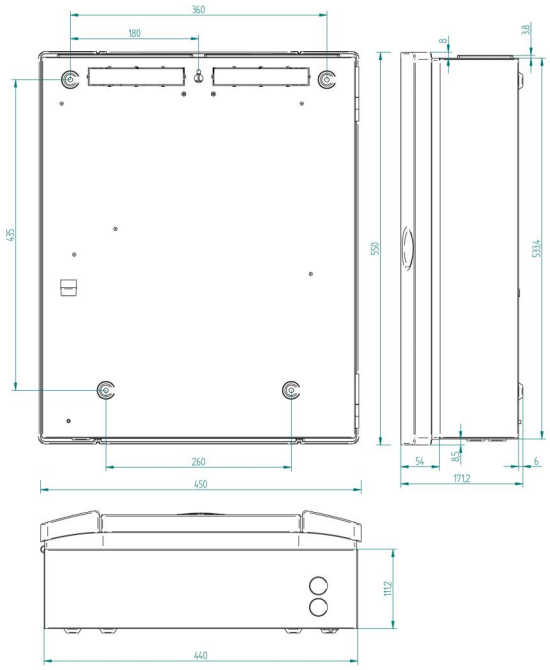

KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57