KFP-CF4-09

Conventional Fire Panel - 4 Zone - Spanish



KFP-CF4-09

Conventional Fire Panel - 4 Zone - Spanish

Specifiche tecniche

General

Maximum system capacity (device count)	up to 2048
Network size (nodes)	up to 16

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	4

Zone

Maximum zone capacity	up to 4

Input

Input quantity	2

Physical

Form factor	Small
Colour	Pure white (RAL 9010)
Mounting type	Surface mount

Environmental

Environment	Indoor

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-4

Prodotti compatibili

Categoria	Riferimento	Descrizione
Batteries	BS127N	Batteria, 12 V, 7,2Ah, approvata VdS (idonea per centrali incendio 1X e 2X)
Panel	2010-1-NB	Scheda network - centrale convenzionale
Panel	2010-1-RB	Modulo opzionale per centrali serie 1X-xx equipaggiato di 4 uscite a rele non controllate
Panel	2010-1-SB	Modulo opzionale per centrali serie 1X-xx equipaggiato di 4 uscite a rele supervisionate

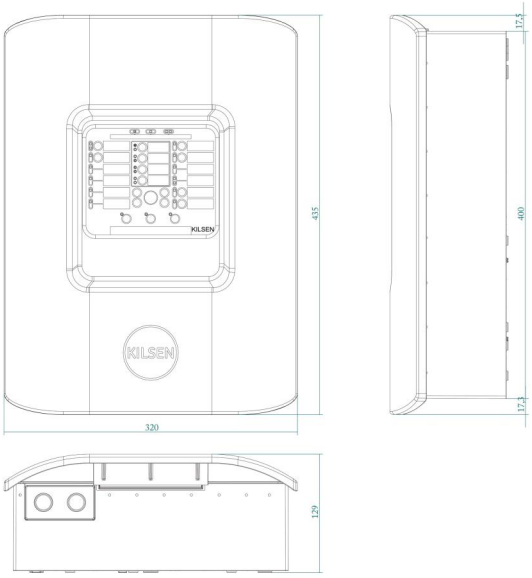

KIDDE COMMERCIAL

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57