ZP2-F2-FB2-99

Addressable Fire Panel with Fire Brigade Controls - 2 Loop - English UK



ZP2-F2-FB2-99

Addressable Fire Panel with Fire Brigade Controls - 2 Loop - English UK

Specifiche tecniche

General

Maximum system capacity (device count)	up to 32512
Network size (nodes)	up to 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	4

Zone

Maximum zone capacity	up to 512

Physical


Form factor	Large
Colour	Grey (RAL 7035)
Mounting type	Surface mount

Environmental

Environment	Indoor

Regulatory

Compliancy	BS5839-1, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

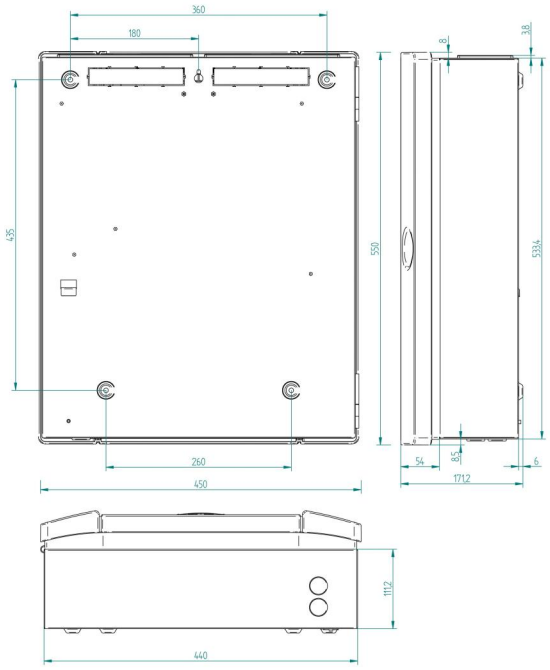

KIDDE COMMERCIAL

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57