KFP-AF2-S-09

Painel Endereçável Kilsen de 2 Loops em Caixa Pequena - Espanha



KFP-AF2-S-09

Painel Endereçável Kilsen de 2 Loops em Caixa Pequena - Espanha

Especificações técnicas

General

Maximum system capacity (device count)	up to 32000
Network size (nodes)	up to 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	2

Zone

Maximum zone capacity	up to 512

Physical

Form factor	Small
Colour	Pure white (RAL 9010)
Mounting type	Surface mount

Environmental


Environment	Indoor

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

Produtos compatíveis

Categoria	Referência	Descrição
Batteries	BS127N	Bateria Selada Chumbo-Ácido, 12 V, 7.2 Ah (somente para painéis 2010-1/2, BS127N-A para todas as outras aplicações)
Panel	2010-2-NB	Carta de Rede FireNet - Série 2x
Panel	2010-2-PAK-NET128	Chave Ativação Aumento Capacidade de Rede - 32 nós e 128 loops
Panel	2010-2-PAK-RMMB	Chave Ativação Protocolo Modbus via Ethernet
Panel	2010-2-PAK-RMOH	Chave Ativação Protocolo Contact ID via Ethernet
Panel	2010-2-PAK-RMSDK	Chave Ativação Serviços SDK

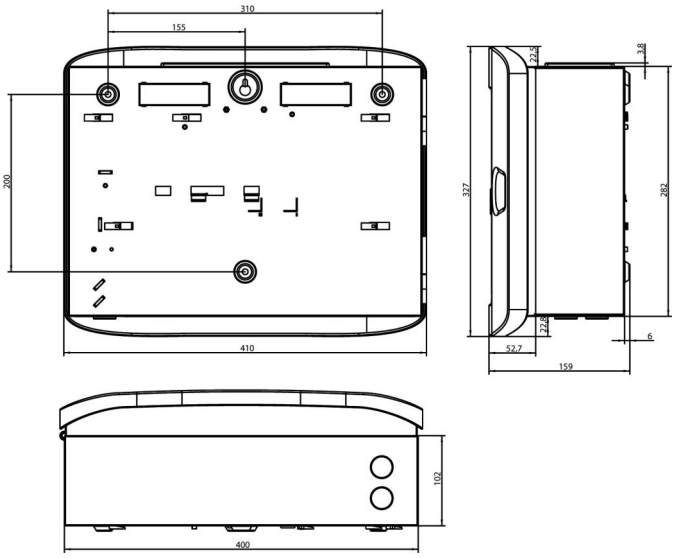

Como empresa de inovação, a Kidde Global Solutions reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 12 November 2026 - 18:57