ZP2-F2-FB2

Addressable Fire Panel with Fire Brigade Controls - 2 Loop



ZP2-F2-FB2

Addressable Fire Panel with Fire Brigade Controls - 2 Loop

Tekniska specifikationer

General

Maximum system capacity (device count)	up to 32512
Network size (nodes)	up to 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	4

Zone

Maximum zone capacity	up to 512

Physical

Form factor	Large
Colour	Grey (RAL 7035)
Mounting type	Surface mount

Environmental

Environment	Indoor

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

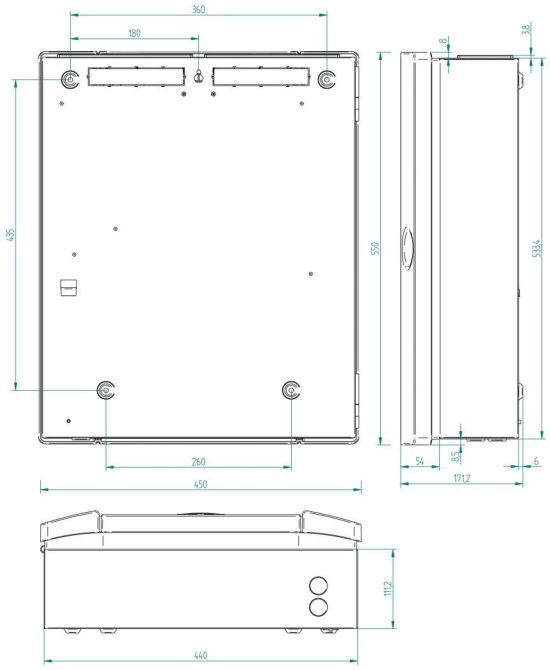

KIDDE COMMERCIAL

Kidde Global Solutions förbehåller sig rätten att ändra produktspecifikationer utan föregående meddelande. För de senaste produktspecifikationerna, besök se.firesecurityproducts.com online eller kontakta din försäljningsrepresentant.

Last updated on 12 November 2026 - 18:57