DD1012

12m Dual Plus Radar/Pir detector, 78°, 'Range Gated Radar techn. EN Grade2



DD1012

12m Dual Plus Radar/Pir detector, 78°, 'Range Gated Radar techn. EN Grade2

Technische specificaties

General

Technology	Dual
Application type	Wandmontage
Anti masking	No
Pet immune	No
Camera	No
Pry-off tamper kit	ST400

Detection

Max. detection range	12 m
Microwave frequency (nom.)	5.8 GHz
Undercrawl protection	Yes
Alarm memory	Yes
Alarm time	3 sek

Wired/wireless

Wired-wireless	Verdrahtet

Inputs/outputs

Relay configuration	Mehrere EOL-Werte
Remote control lines	Tag/Nacht, Gehtest

Physical

Mounting height	1,8 bis 3 m

Environmental

Environment	Drinnen

Regulatory

EN50131 grade	Klasse 2

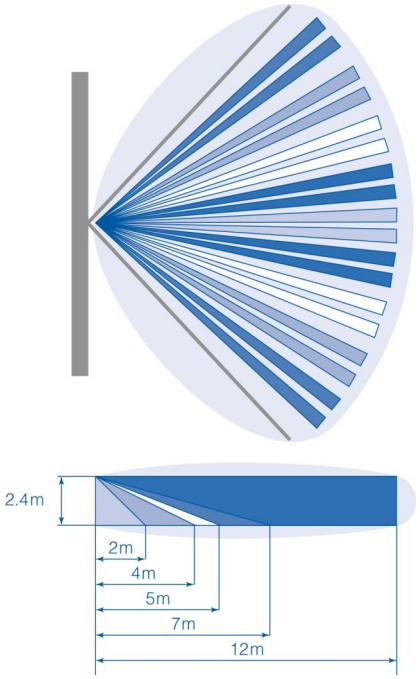

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar nl.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57