KE-IO3101-M


Inteligentny adresowalny moduł sterownia zasilaniem (1 wyjście) z izolatorem zwarć

General

The innovative Excellence series of intelligent addressable devices offers advanced features for reliability and peace of mind. Coupled with features for ease of installation and maintenance on new fire detection systems, it's a perfect match for exceptional overall performance.

The Excellence series input/output devices are designed to provide much needed flexibility to input monitoring and output switching. These modules, combined with the powerful features of a Kidde Excellence series addressable CIE, give customers versatility for diverse applications.

The KE-IO3101-M is an Excellence series addressable mains relay unit with integrated short circuit loop isolation. Powered directly from the Excellence loop, it offers double pole, potential free, change-over relay contacts.

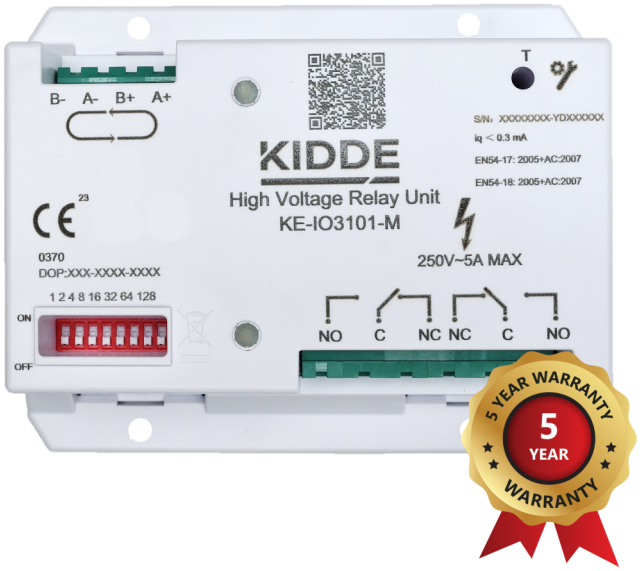

Applications

The KE-IO3101-M is designed for controlling the main electrical supply of ancillary, mains powered equipment. The unit is ideal for the control of door release circuits, extract fans and dampers. The relay may be programmed to be activated by any single device, groups of devices or all system devices. All types of system input signals can be arranged to operate the KE-IO3101-M which can include control panel indicators, zonal outputs, call points or detectors. Both normally closed and normally open relay connections are provided, which if wired incorrectly, can simply be reconfigured in the programming of the unit.

The KE-IO3101-M may be located anywhere on the Kidde Excellence loop where it occupies only 1 of 128 available addresses. Housed in a low profile molding, the interface is designed to clip directly onto a standard DIN rail fixing or be installed in a suitable wall mount housing. It is intended for installation for installation inside the equipment to be switched, thereby offering savings in installation costs

Installation & Maintenance Features

The KE-IO3101-M is connected to the CIE via a 2-wire communication loop that carries both power and control data. Tri-Colour LED indicators positioned on the front face of the unit provide the engineer with clear identification of the operational state of the unit, as well as the status of any input and/or output control. Additional manual test facilities on the unit allows local testing without the need for control panel intervention, saving time during installation and commissioning.

Excellence series devices use an advanced digital data communications protocol with extensive error correction algorithms to ensure system reliability.

Szczegóły

- Zasilany z pętli, bez dodatkowych kosztów zasilaczy i instalacji
- Zapewnia adresowalne wyjście z dwubiegunowymi, bezpotencjałowymi stykami przełącznymi
- Wyjście normalnie otwarte / normalnie zamknięte, pełna elastyczność instalacji
- Programowalna aktywacja dowolnym pobudzeniem wejściowym
- Montaż DIN lub naścienny
- Funkcja testowania lokalnego ułatwiająca weryfikację działania
- Lokalny, czytelny wskaźnik stanu pracy ułatwiający konserwację

KE-IO3101-M

Inteligentny adresowalny moduł sterownia zasilaniem (1 wyjście) z izolatorem zwarć

Specyfikacja techniczna

General

Status indication	Trójkolorowa dioda LED
Compatibility	Systemy Kidde Commercial Excellence
Addressing method	Interruptores DIP
Address range	1 do 128

Electrical

Power supply type	Alimentado por bucle
Operating voltage	17 do 29 VDC
Current consumption	300 µA @ 24 VDC (spoczynek) 2,5 mA @ 24 VDC (aktywacja)
Communication voltage	4 do 11 V (pulsujące)

Output

Output quantity	1 x Dwubiegunowy
Output type and rating	Podwójne przełączanie - 1 A @ 60 VDC / 5 A @ 250 VAC (obciążenie oporowe)
Cable specification	0.13 to 3.31 mm² (12 to 26 AWG) shielded/unshielded twisted-pair

Isolation

Type	Salto de línea negativo
Loop current	2,5 mA (aktywne)
Series resistance	<0,08 Ω
Switch current	1,05 A (ciągły) / 1,4 A (krótki)
Leakage current	<1 mA
Isolation voltage	14 do 15,5 VDC
Reconnect voltage	14 do 15,5 VDC
Impedance requirements	≤ 32 devices between isolators
Quantity per loop	128

Physical

Physical dimensions	109 × 88 × 40 mm (S x W x G)
Net weight	220 g
Colour	Señal blanca (RAL 9003)
Mounting type	DIN-rail, Montaje en Superficie, Wall mount
Material	PC / ABS
Cable specification	Loop: 0.13 to 3.31 mm² (12 to 26 AWG) shielded/unshielded twisted-pair < 52 Ω , < 500 nF

Environmental

Vandal proof	No
Operating temperature	-22 do +55°C
Storage temperature	-30 do +65°C
Relative humidity	10 do 93% bez kondensacji
Environment	Indoor
IP rating	IP30

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	CPR
Standards	EN54-17, EN54-18

Wyroby zgodne

Kategoria	Odniesienie	Opis
Enclosures	N-IO-MBX-1	DIN Rail Module Box
Enclosures	N-IO-MBX-2	DIN Rail Module Box
Interface unit	N-IO-SBX-2G	Single module box with DIN rail (large)

KIDDE COMMERCIAL

Będąc firmą innowacyjną, Kidde Global Solutions zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronach pl/firesecurityproducts.com lub kontakt z przedstawicielem handlowym.

Last updated on 12 November 2026 - 18:57