ZP2-F2-S-99

Addressable Fire Panel - 2 Loop small cabinet - English UK

Overview

The ZP2 Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently lined door with the intuitive light blue inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial.

With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

The Panel

The fire panels supplied in local language, with user interface, with 2 loops that supports up to 254 devices each (127 addresses) in 512 zones, have standard 4 supervised sounder/fire-routing outputs, which can be used as freely programmable outputs as well. In addition 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available.

Options

The panel supports an extra 2 loop board that brings the panel to up to 512 zones with 4 additional programmable outputs.Add a network board to create a maximum of 32 nodes / 32 loops network of fire panels, fire panel repeaters (including conventional fire panels and fire panel repeaters up to a maximum of 64 conventional zones). Last but not least, in case seperate zone indications are required, a 24 zone fire/fault LED indicator board can be mounted in the panel or repeater with space for a 4 digit number.

Approvals & Compliance

- CE / CPD / EN54-2 / EN54-4
- NEN2535 / NBNS21-100 compliant
- BS5839-1 compliant
- VdS and LPCB certified
- WEEE / RoHS compliant



Details

- 2 loops with up to 512 zones and 300 output groups
- Up to 24 LED Zone indicators for Fire and Fault with space for a 4 digit number
- Auto configuration and default EN54 setup modes
- Ethernet port with TCP/IP for remote maintenance and programming
- EN54 compliant graphical LCD with icons and symbols for easy recognition of events
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 user names and passwords)
- History log memory for 9999 events
- Compatible with the Ziton loop powered sounders/beacons and base sounders and Ziton series detectors

ZP2-F2-S-99

Addressable Fire Panel - 2 Loop small cabinet - English UK

Technical specifications

General

Maximum system capacity (device count)	jusqu'à 16256
Network size (nodes)	jusqu'à 64

Electrical

Power supply type	VAC
Operating voltage	110 /230 VAC (+10%/-15%) 50 / 60 Hz (±5%)
Current consumption	Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A

Loop

Maximum loop capacity	2
Outputs	2, 300 mA @11 VDC (peak 500 mA @20 V)
Cable length	max 75 ohms / 700 nF (max 2k m with 2m m² and 127 detectors)
Cable type	Recommended 2 core 1.5 mm² twisted pair

Zone

Maximum zone capacity	jusqu'à 512

Input

Programmable	2
Termination	15 kohm
Cable type	Recommended 2 core 1.5 mm² twisted pair
Maximum Load	150 mA

Output

Termination	15 kohm
Programmable supervised	4, 750 mA / 19.5 to 28 VDC (24 VDC nominal)
General Fire + Fault supervised	2, 350 mA / 19.5 to 28 VDC (24 VDC nominal)
General Fire + Fault relay	2
Aux	1 resetable, 500 mA / 19.5 to 28 VDC (24 VDC nominal)
Cable type	Recommended 2 core 1.5 mm² twisted pair

Standby battery

Capacity	Max. 2 x 12 V / 7.2 Ah (use supplied cables)

Physical

Form factor	Lille
Physical dimensions	410 x 298 x 162 mm (W x H x D)
Net weight	5.2 kg (without battery)
Shipping weight	6.6 kg
Colour	Gris (RAL 7035)
Mounting type	Montage en surface
Cable entries	9 (20mm) / 2 (20mm) / 2 removable plates (Top/Bottom/Back)

Environmental

Operating temperature	-5 to +40°C
Storage temperature	-10 to +50°C
Relative humidity	95% max. noncondensing
Environment	Indendør
IP rating	IP30: for indoor use only

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

Mains supply

Fuse rating	2 / 4 A
Cable type	3 x 1.5 mm² (live, neutral, earth)

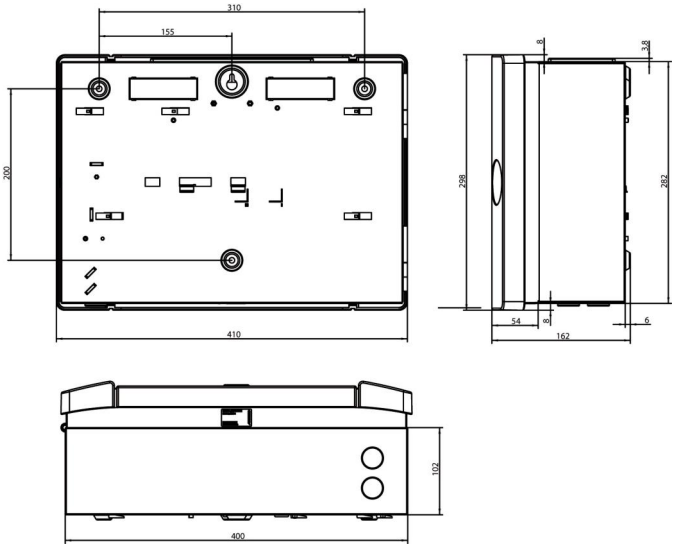

KIDDE COMMERCIAL

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 16 October 2026 - 9:46