# KFP-AF1-09

**Painel Endereçável Kilsen de 1 Loop - Espanha**



# KFP-AF1-09

## Painel Endereçável Kilsen de 1 Loop - Espanha

## Especificações técnicas

### General

| | |
|---|---|
| Maximum system capacity (device count) | jusqu'à 16000 |
| Network size (nodes) | jusqu'à 64 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 1 |

### Zone

| | |
|---|---|
| Maximum zone capacity | jusqu'à 512 |

### Physical

| | |
|---|---|
| Form factor | Groß |
| Colour | Blanc pur (RAL 9010) |
| Mounting type | Montage en surface |

### Environmental

| | |
|---|---|
| Environment | Drinnen |

### Regulatory

| | |
|---|---|
| Compliancy | BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE |
| Certification | EN54-13, EN54-2, EN54-21, EN54-4, VdS |

### Produtos compatíveis

| Categoria | Referência | Descrição |
|---|---|---|
| Batteries | BS131N | Bateria Selada Chumbo-Ácido, 12 V, 18 Ah |
| Panel | 2010-2-NB | Carta de Rede FireNet - Série 2x |
| Panel | 2010-2-PAK-NET128 | Chave Ativação Aumento Capacidade de Rede - 32 nós e 128 loops |
| Panel | 2010-2-PAK-RMMB | Chave Ativação Protocolo Modbus via Ethernet |
| Panel | 2010-2-PAK-RMOH | Chave Ativação Protocolo Contact ID via Ethernet |
| Panel | 2010-2-PAK-RMSDK | Chave Ativação Serviços SDK |

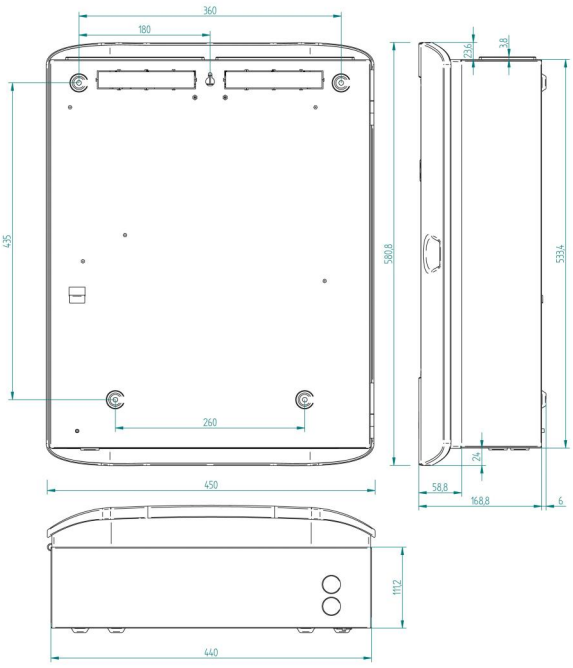


Como empresa de inovação, a Kidde Global Solutions reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 12 November 2026 - 18:57