KFP-CX3-09

Conventional Fire and Extinguishing Panel - 3 Zone - Spanish



KFP-CX3-09

Conventional Fire and Extinguishing Panel - 3 Zone - Spanish

Tekniske specifikationer

General

Maximum system capacity (device count)	up to 96

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	3

Zone

Maximum zone capacity	fino a 3

Physical

Form factor	Medium
Colour	Bianco puro (RAL 9010)
Mounting type	Montaggio a superficie

Environmental


Environment	Indendør

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN12094-1, EN54-13, EN54-2, EN54-4

Kompatible produkter

Kategori	Reference	Beskrivelse
Batteries	BS130N	Akkumulator, blygel, 12 V, 12 Ah
Panel	2010-1-RB	Konventionel Brand central Tilbehør Relæ PCB printkort - Ikke overvåget
Panel	2010-1-SB	Konventionel Brand central Tilbehør Relæ PCB printkort - Overvåget

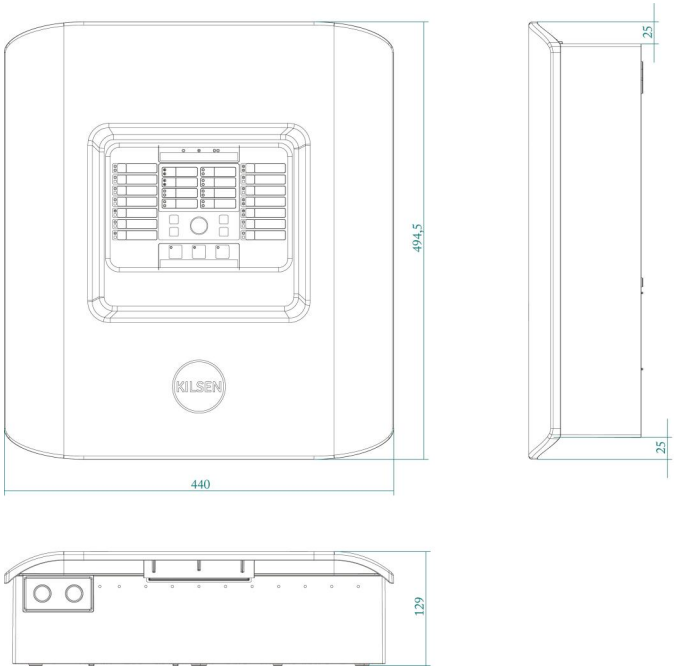

Kidde Global Solutions er et innovativt selskab og forbeholder sig ret til at ændre produktspecifikationer uden varsel. De nyeste produktspecifikationer kan du finde på dk.firesecurityproducts.com eller ved at kontakte din salgsrepræsentant hos.

Last updated on 12 November 2026 - 18:57