KFP-CX3-09

Conventional Fire and Extinguishing Panel - 3 Zone - Spanish



KFP-CX3-09

Conventional Fire and Extinguishing Panel - 3 Zone - Spanish

Specyfikacja techniczna

General

Maximum system capacity (device count)	up to 96

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	3

Zone

Maximum zone capacity	fino a 3

Physical

Form factor	Medium
Colour	Bianco puro (RAL 9010)
Mounting type	Montaggio a superficie

Environmental


Environment	Indoor

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN12094-1, EN54-13, EN54-2, EN54-4

Wyroby zgodne

Kategoria	Odniesienie	Opis
Batteries	BS130N	Akumulator bezobsługowy, 12 V, 12 Ah, 151 x 98 x 94 mm, zaciski konektorowe
Panel	2010-1-RB	Karta 4 wyjść przekaźnikowych programowanych do centrali rodziny 1X
Panel	2010-1-SB	Karta 4 wyjść monitorowanych do centrali rodziny 1X

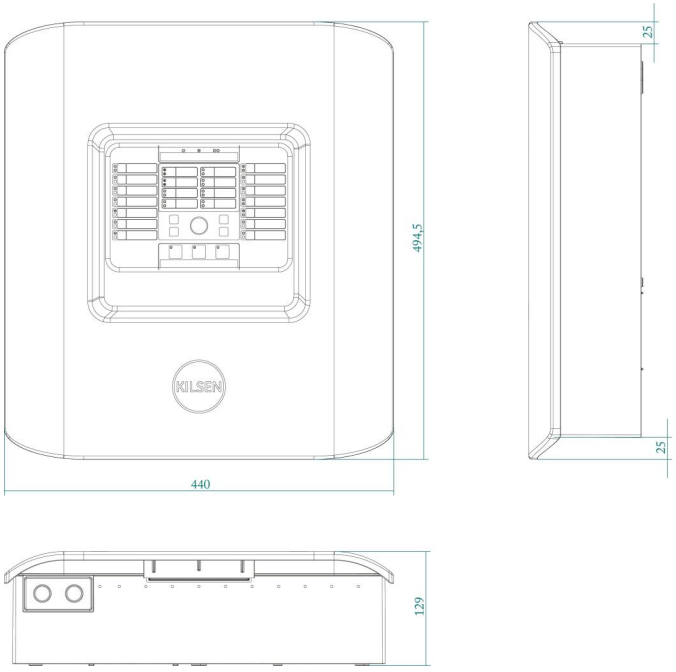

Będąc firmą innowacyjną, Kidde Global Solutions zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronach pl/firesecurityproducts.com lub kontakt z przedstawicielem handlowym.

Last updated on 12 November 2026 - 18:57