KFP-CX3-09

Conventional Fire and Extinguishing Panel - 3 Zone - Spanish



KFP-CX3-09

Conventional Fire and Extinguishing Panel - 3 Zone - Spanish

Tekniska specifikationer

General

Maximum system capacity (device count)	up to 96

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	3

Zone

Maximum zone capacity	fino a 3

Physical

Form factor	Medium
Colour	Bianco puro (RAL 9010)
Mounting type	Montaggio a superficie

Environmental


Environment	Indendør

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN12094-1, EN54-13, EN54-2, EN54-4

Kompatibla produkter

Kategori	Referens	Beskrivning
Batteries	BS130N	Blyackumulator, 12 V, 12 Ah, mått 151 x 99 x 95 mm
Panel	2010-1-RB	Utgångskort med fyra utgångar. Försedd med fyra stycken potentialfria programmerbara reläer.
Panel	2010-1-SB	Utgångskort med fyra övervakade utgångar (larmdonskort). Försedd med fyra stycken övervakade programmerbara utgångar.

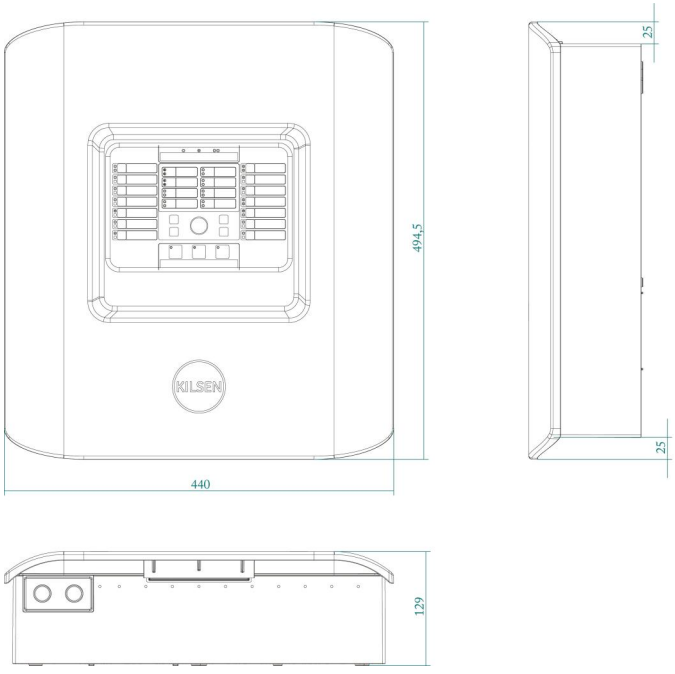

Kidde Global Solutions förbehåller sig rätten att ändra produktspecifikationer utan föregående meddelande. För de senaste produktspecifikationerna, besök se.firesecurityproducts.com online eller kontakta din försäljningsrepresentant.

Last updated on 12 November 2026 - 18:57