
ATS1238

DGP Wireless para PIRcam com 32 zonas RF 868AM Gen2

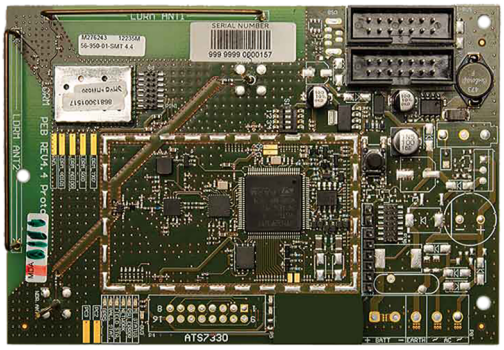

ATS1238

DGP Wireless para PIRcam com 32 zonas RF 868AM Gen2

Especificações técnicas

General

Expander type	Drahtloser Expander
Product line	Advisor Advanced, Axon

System

Addressing	Dip-Schalter

Wireless

Operating frequency	2.4 GHz, 868 MHz AM
Wireless open-air range	400 m

Electrical

Power supply type	12 VDC
Integrated power supply	No

Environmental

Environment	EN50130-5 ; Klasse II - Binnen (algemeen)

Regulatory

Compliancy	CE
Certification	CE, EN50131 Grad 2, INCERT

Como empresa de inovação, a Kidde Global Solutions reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 12 November 2026 - 18:57