ASC366W

Conventional Ceiling Mount VAD, Multi Tone, Shallow Base - Red Flash



ASC366W

Conventional Ceiling Mount VAD, Multi Tone, Shallow Base - Red Flash

Spécifications techniques

Electrical

Current consumption	Sounder: 5.1 mA, Beacon: 20 mA @ 0.5 Hz / 40 mA @ 1 Hz

Physical

Net weight	215 g
Colour	Weiß
Material	Wysokoudarowy poliwęglan

Environmental

Operating temperature	-25 to +70°C
Relative humidity	5 to 95%
Environment	Drinnen
IP rating	IP21

Regulatory

Certification	EN54-23, EN54-3

EN54-23 Coverage: C–3-8.9

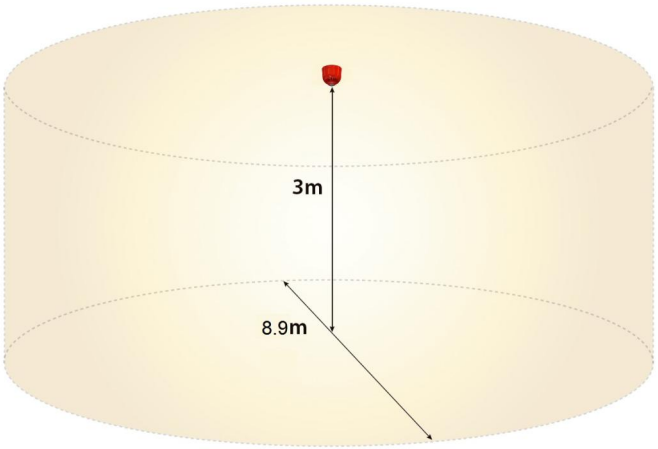

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57