KFP-AF1-09

Addressable Fire Panel - 1 Loop - Spanish



KFP-AF1-09

Addressable Fire Panel - 1 Loop - Spanish

Spécifications techniques

General

Maximum system capacity (device count)	do 16000
Network size (nodes)	do 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	1

Zone

Maximum zone capacity	do 512

Physical

Form factor	Groß
Colour	Czysta biel (RAL 9010)
Mounting type	Montaż nawierzchniowy

Environmental


Environment	Drinnen

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

Produits compatibles

Catégorie	Référence	Description
Batteries	BS131N	Batterie, 12 V, 18 Ah
Panel	2010-2-NB	Addressable fire panel accessory, network printed circuit board
Panel	2010-2-PAK-NET128	2010-2 PAK Increases the network capability to 32 nodes and 128 loops
Panel	2010-2-PAK-RMMB	2010-2 PAK Enables the Modbus protocol over Ethernet
Panel	2010-2-PAK-RMOH	2010-2 PAK Enables the Contact ID protocol over Ethernet
Panel	2010-2-PAK-RMSDK	2010-2 PAK Enables custom event reporting and command control using the Edwards

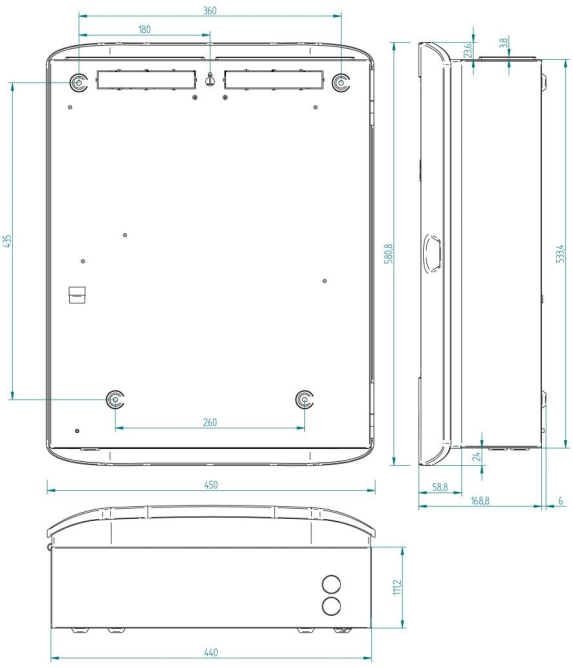

KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57