# KFP-AF1-10

**Addressable Fire Panel - 1 Loop - Italian**



# KFP-AF1-10

## Addressable Fire Panel - 1 Loop - Italian

## Tekniska specifikationer

### General

| | |
|---|---|
| Maximum system capacity (device count) | até 16000 |
| Network size (nodes) | até 64 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 1 |

### Zone

| | |
|---|---|
| Maximum zone capacity | até 512 |

### Physical


| | |
|---|---|
| Form factor | Stor |
| Colour | Branco puro (RAL 9010) |
| Mounting type | Montagem em superfície |

### Environmental

| | |
|---|---|
| Environment | Indendør |

### Regulatory

| | |
|---|---|
| Compliancy | BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE |
| Certification | EN54-13, EN54-2, EN54-21, EN54-4, VdS |

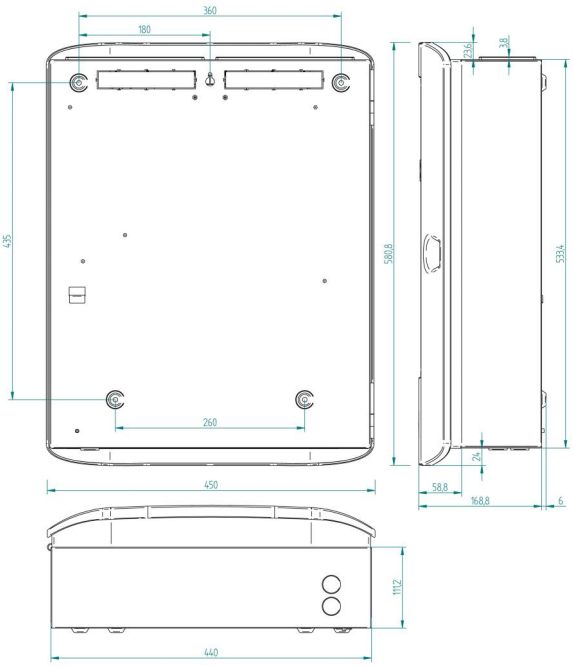


Kidde Global Solutions förbehåller sig rätten att ändra produktspecifikationer utan föregående meddelande. För de senaste produktspecifikationerna, besök se.firesecurityproducts.com online eller kontakta din försäljningsrepresentant.

Last updated on 12 November 2026 - 18:57