1X-X3E-99

Enhanced Conventional Fire and Extinguishing Panel - 3 Zone - English UK



1X-X3E-99

Enhanced Conventional Fire and Extinguishing Panel - 3 Zone - English UK

Specifiche tecniche

General

Maximum system capacity (device count)	do 1260
Network size (nodes)	do 21

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	3

Zone

Maximum zone capacity	do 3

Physical


Form factor	Medium
Colour	Szary (RAL 7035)
Mounting type	Montaż nawierzchniowy

Environmental

Environment	Indendør

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN12094-1, EN54-2, EN54-4

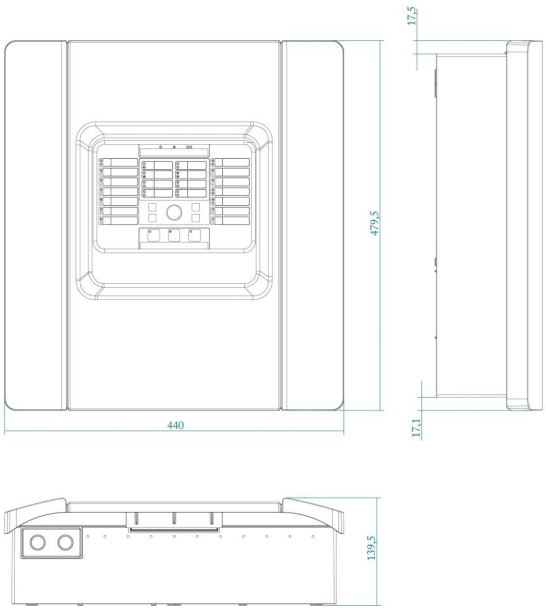

KIDDE COMMERCIAL

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57