# SMA-L-MULTI

**MA SIGMA Lite - Multi, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, 500 users, IP65, CE**



# SMA-L-MULTI

## MA SIGMA Lite - Multi, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, 500 users, IP65, CE

## Specifiche tecniche

### System

| | |
|---|---|
| RTE (Request To Exit) | No |
| CSN (Card Serial Number) | Yes |
| Custom data model | Yes |

### Technology

| | |
|---|---|
| Reader type | Biométrico |
| Reader operating-transmitting frequency | 13.56 MHz |
| Supported technology 13.56 MHz | MIFARE Classic (CSN), MIFARE Classic (dados personalizados), MIFARE DESFire (CSN), MIFARE DESFire EV1 (CSN), MIFARE DESFire EV1 (dados personalizados), Mifare DESFire EV2 (CSN), MIFARE Plus (CSN), MIFARE Plus (CSN, level 1 and 3), NFC (CSN) |
| SAM module embedded | No |

### Biometric

| | |
|---|---|
| Biometric type | Impressão Digital |
| Biometric sensor type | Ótico |

### Interface & connections

| | |
|---|---|
| Interface | Ethernet, OSDP V2, OSDP V2 Canal Seguro, RS-485, USB, Wiegand |
| Connector type | Netværk, Svinesvans |

### Tamper type

| | |
|---|---|
| Pry-off tamper | No |
| Opening tamper | Yes |

### Operation

| | |
|---|---|
| Stand-alone | Yes |
| PIN keypad | No |

### Electrical

| | |
|---|---|
| Power supply type | VDC |

### Physical


| | |
|---|---|
| Colour | Sort |
| Material | Polycarbonat |
| Form factor | Overdimensioneret |
| Mounting type | Montagem em superfície |

### Environmental

| | |
|---|---|
| Vandal proof | No |

### Regulatory

| | |
|---|---|
| Compliancy | CE, FCC, REACH, RoHS |

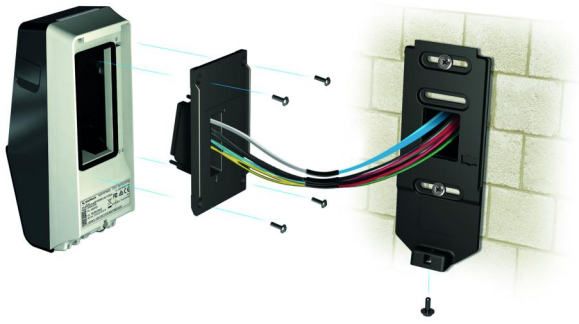

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57