KFP-AF1-09

Addressable Fire Panel - 1 Loop - Spanish



KFP-AF1-09

Addressable Fire Panel - 1 Loop - Spanish

Technische specificaties

General

Maximum system capacity (device count)	até 16000
Network size (nodes)	até 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	1

Zone

Maximum zone capacity	até 512

Physical

Form factor	Stor
Colour	Branco puro (RAL 9010)
Mounting type	Montagem em superfície

Environmental


Environment	Indendør

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

Compatibele producten

Categorie	Referentie	Beschrijving
Batteries	BS131N	Droge accu, 12 V, 18 Ah, VdS
Panel	2010-2-NB	Netwerk kaart om brandcentrales/herhaalborden met elkaar in netwerk te verbinden.
Panel	2010-2-PAK-NET128	2010-2 PAK Increases the network capability to 32 nodes and 128 loops
Panel	2010-2-PAK-RMMB	2010-2 PAK Enables the Modbus protocol over Ethernet
Panel	2010-2-PAK-RMOH	2010-2 PAK Enables the Contact ID protocol over Ethernet
Panel	2010-2-PAK-RMSDK	2010-2 PAK Enables custom event reporting and command control using the Edwards

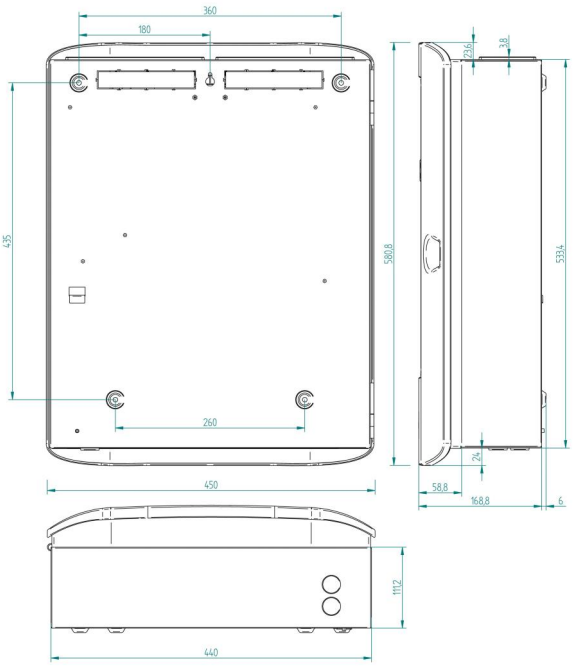

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57