ZP2-F2-FB2-99

Addressable Fire Panel with Fire Brigade Controls - 2 Loop - English UK



ZP2-F2-FB2-99

Addressable Fire Panel with Fire Brigade Controls - 2 Loop - English UK

Specyfikacja techniczna

General

Maximum system capacity (device count)	up to 32512
Network size (nodes)	up to 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	4

Zone

Maximum zone capacity	up to 512

Physical


Form factor	Large
Colour	Grå (RAL 7035)
Mounting type	Ytmontering

Environmental

Environment	Indoor

Regulatory

Compliancy	BS5839-1, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

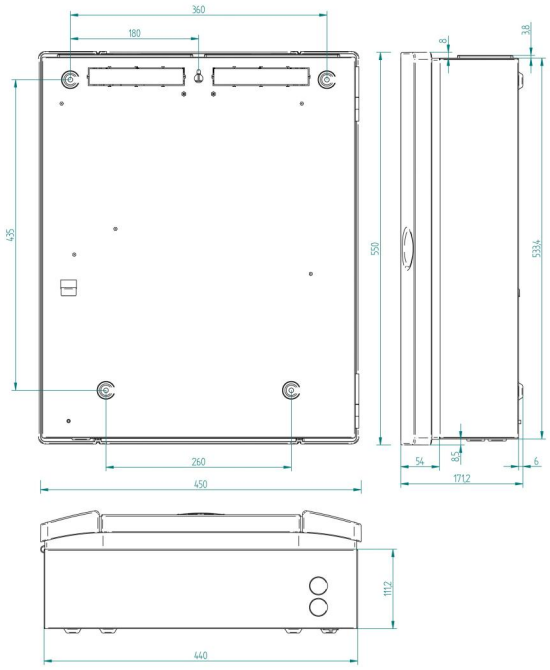

Będąc firmą innowacyjną, Kidde Global Solutions zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronach pl/firesecurityproducts.com lub kontakt z przedstawicielem handlowym.

Last updated on 12 November 2026 - 18:57